



US008375917B1

(12) **United States Patent**
Neal et al.

(10) **Patent No.:** **US 8,375,917 B1**
(45) **Date of Patent:** **Feb. 19, 2013**

(54) **ENGINE OIL COOLER**

(76) Inventors: **Gene Neal**, Mesa, AZ (US); **Kennith Neal**, Mesa, AZ (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 176 days.

(21) Appl. No.: **12/804,474**

(22) Filed: **Jul. 22, 2010**

Related U.S. Application Data

(60) Provisional application No. 61/271,719, filed on Jul. 23, 2009.

(51) **Int. Cl.**
F01M 5/00 (2006.01)

(52) **U.S. Cl.** **123/196 AB**; 123/196 A; 123/41.55; 123/41.56; 184/104.3

(58) **Field of Classification Search** 123/196 AB, 123/41.55, 41.56, 41.57, 41.58; 184/6.5, 184/104.1, 104.2, 104.3

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,223,197	A *	12/1965	Conover et al.	184/6.28
4,324,213	A *	4/1982	Kasting et al.	123/196 A
4,700,670	A *	10/1987	Schade	123/196 A
4,950,400	A *	8/1990	Gironi	210/335

5,406,910	A *	4/1995	Wallin	123/41.33
6,182,616	B1 *	2/2001	Itoh et al.	123/41.1
6,536,381	B2 *	3/2003	Langervik	123/41.33
6,666,968	B2 *	12/2003	Smith et al.	210/254
6,821,444	B2 *	11/2004	Benenson, Jr. et al.	210/785
6,955,150	B2 *	10/2005	Moss	123/196 AB
7,213,542	B2 *	5/2007	Oshima et al.	123/41.51
7,377,350	B2 *	5/2008	Gokan et al.	180/229
2002/0148431	A1 *	10/2002	Lawrence	123/195 C

* cited by examiner

Primary Examiner — Noah Kamen


Assistant Examiner — Grant Moubry

(74) *Attorney, Agent, or Firm* — John D. Titus

(57) **ABSTRACT**

An engine oil cooling system having a manifold which replaces the conventional OEM oil cooler. The manifold receives hot oil from the engine and directs the oil to a filter and then to a liquid-to-air heat exchanger. The cooled, filtered oil is returned to the engine via the manifold. Particulate filtration may be achieved in the manifold at a cleanable filter screen. Provision is made for installation of various monitoring sensors, a check valve between the manifold and filter and a bleed valve in the manifold. The system may also include a by-pass which will direct oil around the heat exchanger if the oil is below a prescribed temperature or if the oil pressure differential between the inlet and outlet of the cooler is greater than a setting of a control relief valve. The system may also include provision for heating the oil using engine coolant during initial start-up.

13 Claims, 4 Drawing Sheets

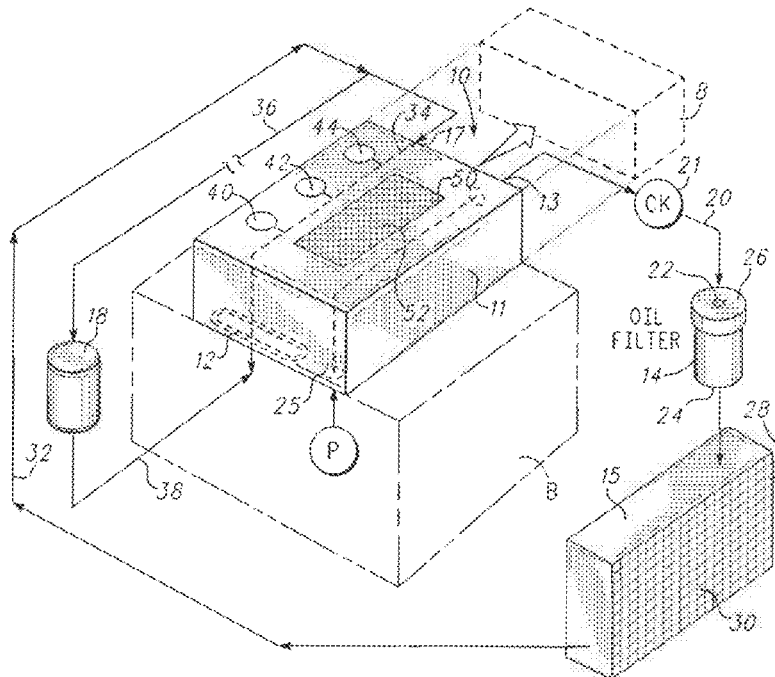

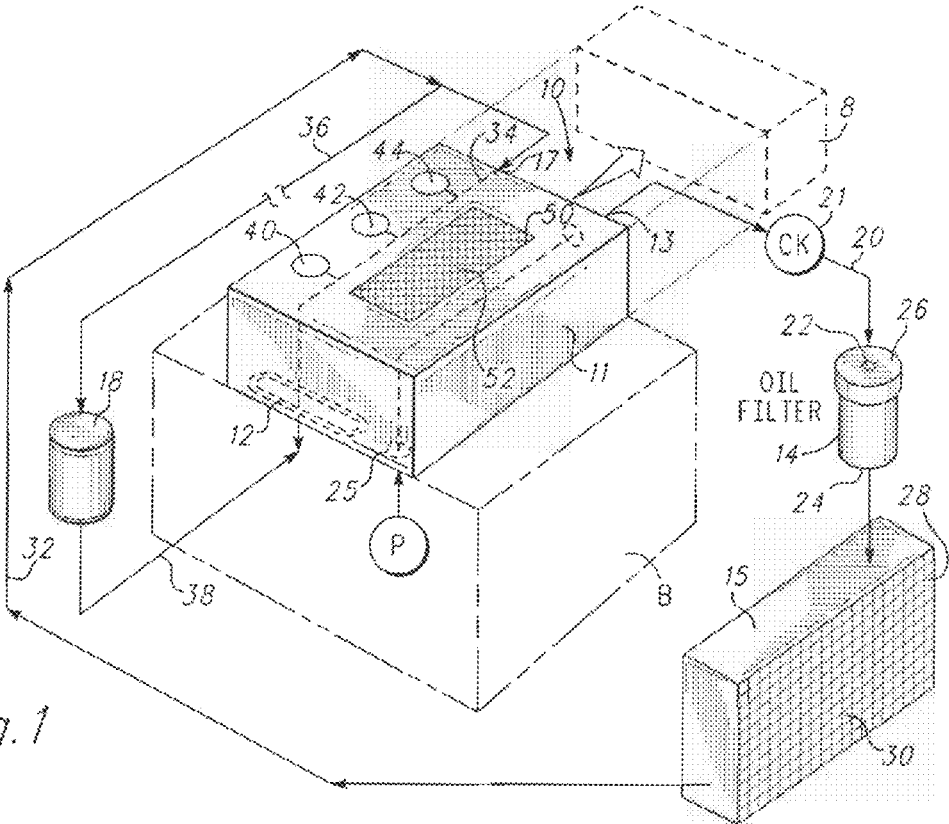


Fig. 1

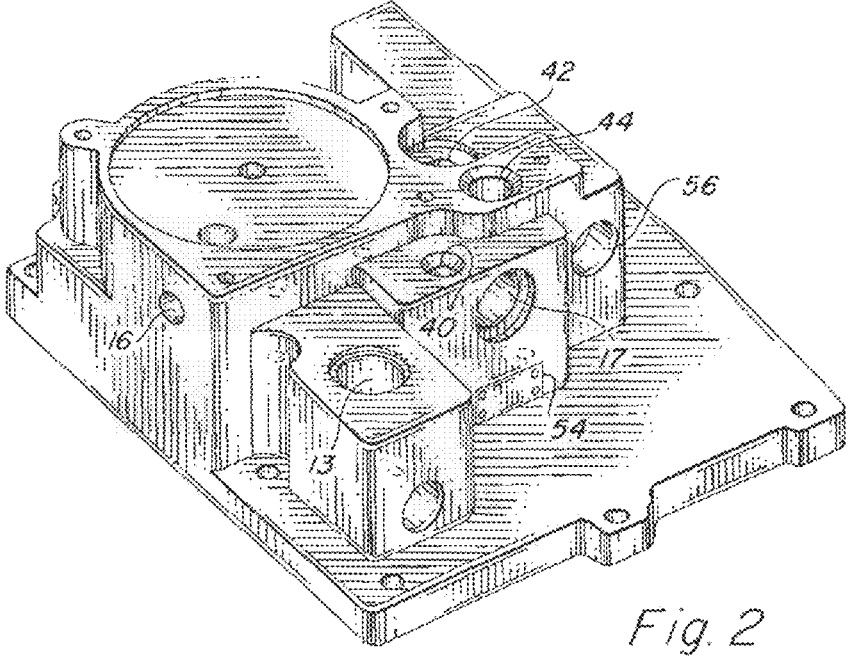


Fig. 2

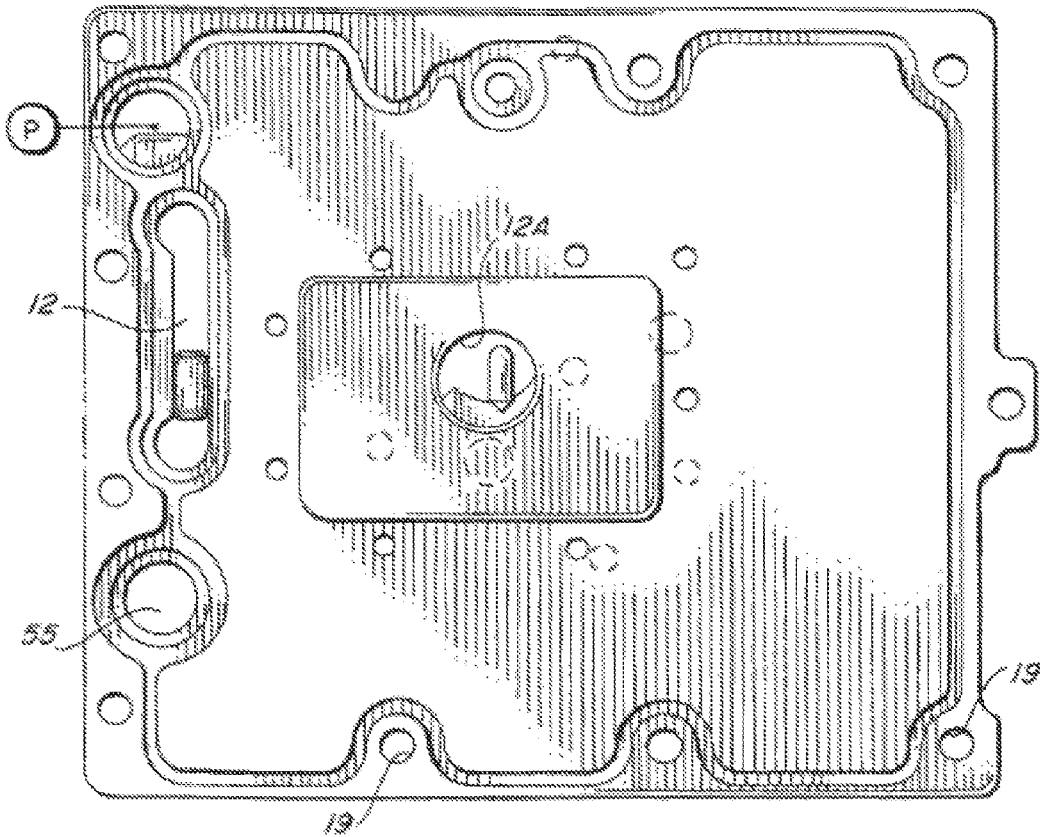


Fig. 3

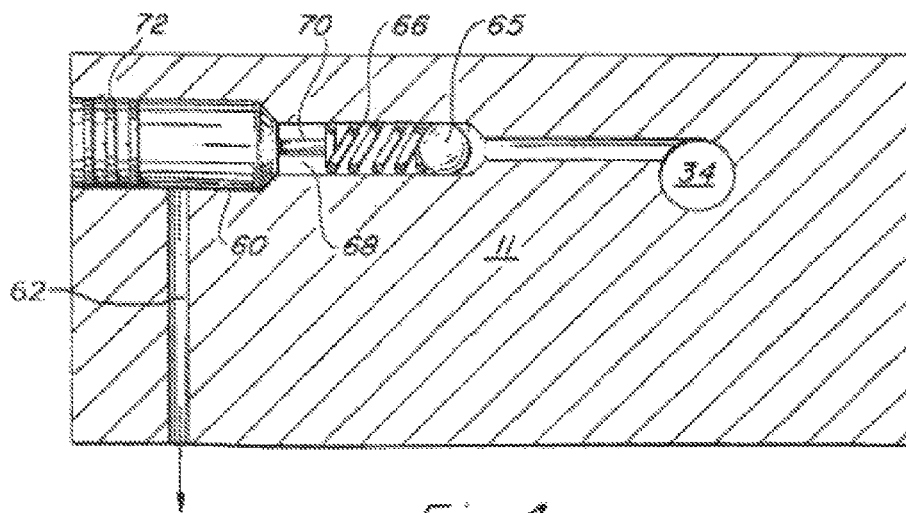


Fig. 4

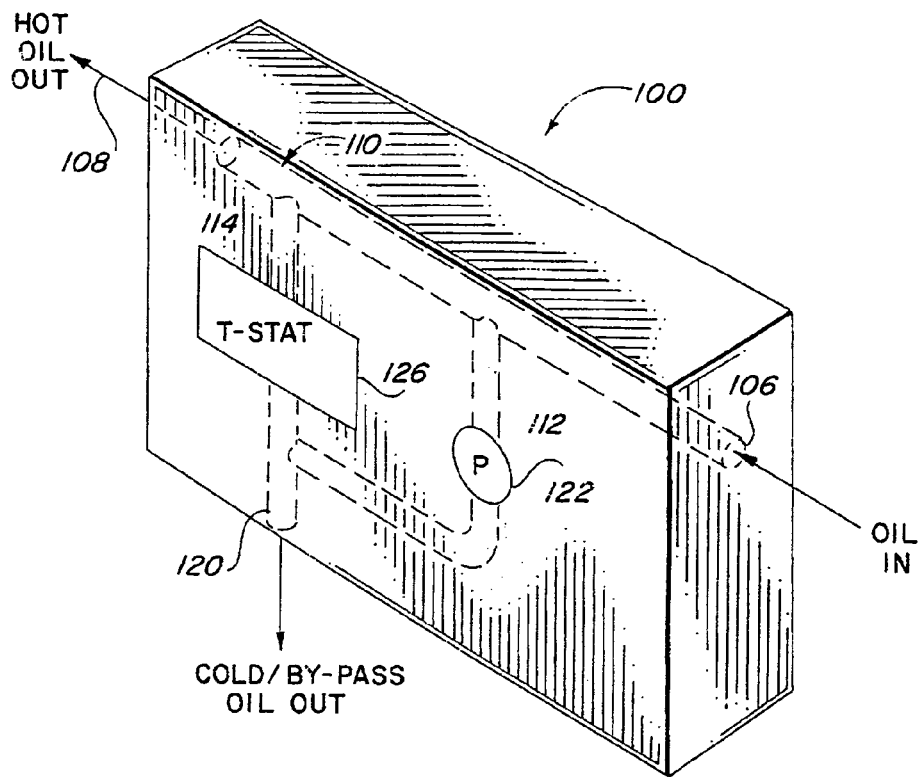


Fig. 5

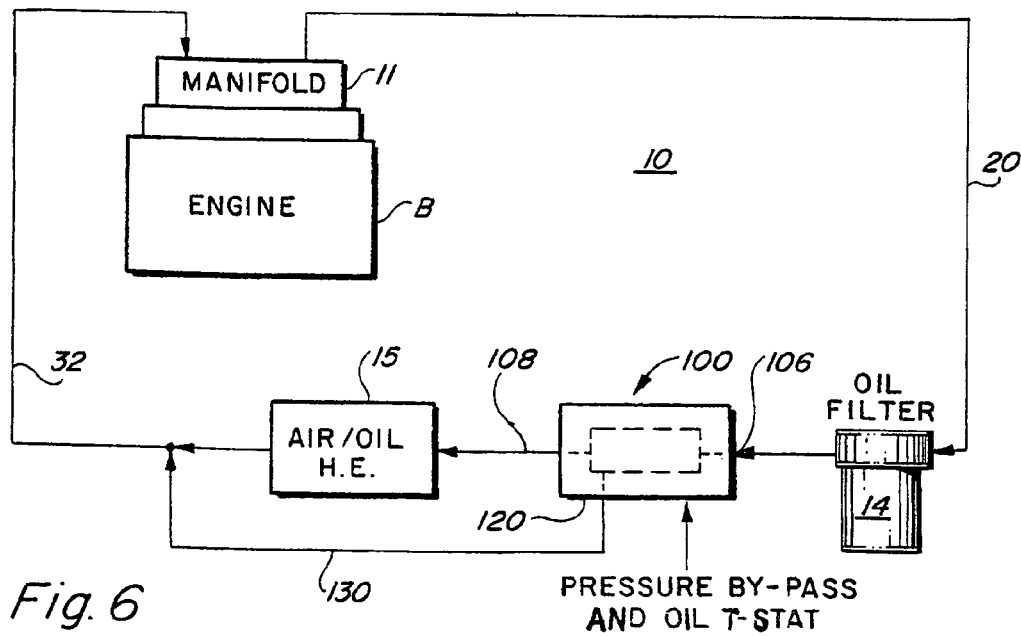


Fig. 6

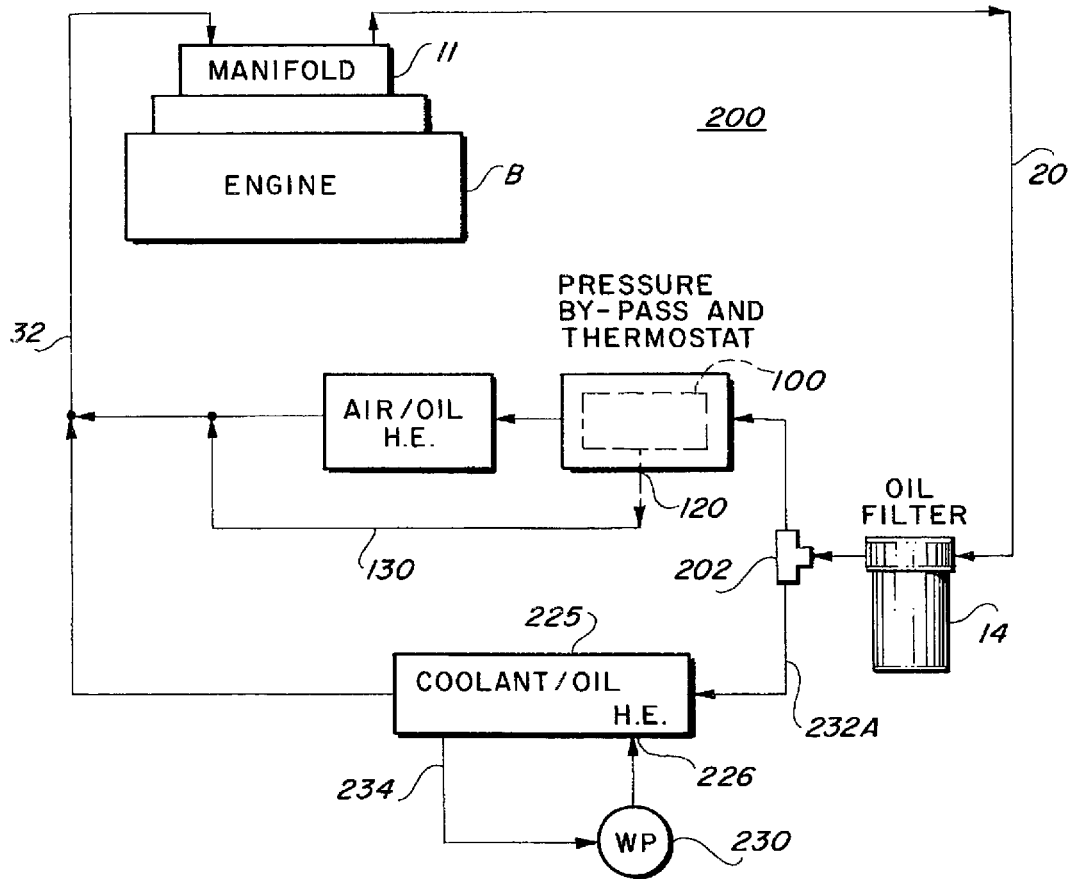


Fig. 7

1

ENGINE OIL COOLER**CROSS-REFERENCE TO RELATED APPLICATION IS MADE**

This application is based on U.S. Provisional Patent Application Ser. No. 61/271,719, filed Jul. 23, 2009, of the same title.

FIELD OF THE INVENTION

The present invention relates to a cooling system for an internal combustion engine and more particularly relates to an oil cooling system for both combustion ignition and diesel engines, collectively internal combustion (IC) engines.

BACKGROUND OF THE INVENTION

Most internal combustion engines require a cooling circuit having a coolant pump, radiator and passageways which circulate a coolant from the radiator through the engine block to cool the engine block and the moving components in the engine block. Lubricants, typically a synthetic or mineral-based oil, are utilized to lubricate the relatively moving surfaces in the engine to counteract friction, reduce wear and reduce operating temperatures.

However, excessive heat generated in the operation of the engine may cause the oil to degrade and break down losing its lubricating ability. When motor oils break down, they oxidize, thermally degrade and lose viscosity due to shear forces. As a result, many internal combustion engines, particularly high speed diesel engines and high performance combustion ignition engines, utilize engine block mounted oil coolers. Oil from the engine is passed through a cooler which operates as a heat exchanger with heat exchanger fluid, usually water and glycol, being provided from the engine cooling system from either the radiator or the engine block.

However, since the opening temperature of the thermostat in cooling systems of most internal combustion engines is approximately in the range of 180° to 200° Fahrenheit, an oil cooler utilizing engine coolant as the heat exchanger fluid is limited in its ability to cool the engine oil. By the operation of the cooling system thermostat in many engines, an oil temperature of approximately 200° to 220° F. is maintained so that the oil effectively lubricates and does not break down or degrade. Further, a low oil temperature is preferred because the oil, in addition to being a lubricant, also serves to cool the internal combustion engine components.

In a coolant to oil cooler system, the engine oil temperature is dependent upon the coolant supply. In the event of even a minor coolant loss, the engine may be damaged as the engine will incur the cooling loss provided both by the coolant and the engine oil.

Accordingly, there exists a need for an improved coolant to oil cooler system for IC engines which obviates the deficiencies set forth above.

BRIEF SUMMARY OF THE INVENTION

Briefly, the present invention provides a cooling system which replaces the conventional engine mounted coolant-to-oil heat exchanger with an external, high-capacity air-to-liquid heat exchanger. An adaptor block or manifold is configured to replace an existing Original Equipment Manufacturer (OEM) engine oil cooler and is mounted in

2

place on the engine block utilizing the existing mounting and similar hardware and gaskets that secure the conventional engine oil cooler in place.

The manifold is configured or ported with a passageway to receive the hot, unfiltered oil from the engine and directs the oil to a canister-style oil filter of the type having a replaceable cartridge. The filter may be located immediately adjacent to the manifold or may be at a remote location within the engine compartment. Filtered oil from the oil filter is directed to a high-capacity air to liquid heat exchanger which returns the cooled and filtered oil to the manifold which, in turn, returns cooled and filtered oil to the engine. The system may also include separate bypass filtration and a particle filtration screen within the manifold, as well as an oil bleeder valve and an anti-siphon valve. Suitable provision is made in the manifold for installation of sensors to measure engine operating parameters such as oil pressure and temperature. Further provision can be made for oil supply to an accessory such as a turbo charger.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other advantages and objects of the present invention will become more apparent when taken in conjunction with the following description, claims and drawings in which:

FIG. 1 is a schematic representation of an embodiment of a cooling system according to the present invention;

FIG. 2 is a detailed perspective view of the adaptor or manifold section of the cooling system shown in FIG. 1;

FIG. 3 is a plan view of the bottom of the manifold showing a representative mounting configuration which is adapted to replace the conventional OEM oil cooler;

FIG. 4 is a cross-sectional view of a section of the manifold illustrating the air bleed valve;

FIG. 5 is a schematic view of an engine oil by-pass that may be incorporated into the cooling system;

FIG. 6 is a schematic view showing the oil by-pass of FIG. 5 incorporated in the system of FIG. 1; and

FIG. 7 is a schematic showing a modified system as shown in FIG. 6 further including both coolant-to-oil and air-to-oil heat exchangers with by-pass features to provide warming of the engine oil upon start-up.

DETAILED DESCRIPTION OF THE DRAWINGS

Turning now to the drawings, FIG. 1 shows the cooling system of the present invention mounted in place on the cylinder block B of an IC engine which is represented schematically by dotted lines. The mounting location may vary depending on the engine configuration. The IC engine may be a CI or diesel having an engine mounted cooler 8 which is removed and replaced with a manifold 11. The system indicated by the numeral 10 includes a housing or manifold 11 which may be cast and machined from a single block or billet of material such as steel or aluminum. Preferably the underside of the manifold, as best seen in FIG. 3, is machined to conform to the mounting configuration of the conventional coolant-to-oil cooler mounted on the engine block which cooler has been removed, having bolt holes 19 conforming to the existing bolt pattern. FIG. 3 shows a representative 5 mounting for a 6.0 L International® VT365 diesel engine also known as the 6.0 L Ford® Powerstroke diesel engine (hereinafter referred to as the "6.0 L VT365 diesel engine"). If the engine has not been originally equipped with an oil cooler, suitable mounting provision for the manifold must be made which may involve appropriate modifications such as tapping

the engine block at suitable locations for mounting the manifold and installing suitable hydraulic lines.

However, in most cases, the cooling system of the present invention will be applicable and is adapted for replacement of a conventional engine mounted coolant-to-oil cooler and the following description proceeds on that basis. Once the existing oil cooler is removed, the manifold **11** is secured using suitable hardware and gaskets to position and mount the housing on the engine block **B**. Port or passageway **25** in the underside of the manifold aligns with a port **P** in the engine block **B** through which hot, unfiltered oil is directed to the manifold **11**. The oil enters the manifold at passageway **25** and flows through the manifold **11** exiting at port **13**. Port **13** is connected by a hydraulic line **20** to oil filter **14**. Line **20** has an anti-siphon check valve **21** to prevent reverse flow of oil through line **20**. The oil filter **14** may be located immediately adjacent the manifold **11** or may be at a convenient location in the engine compartment considering engine size, available space and other installation restrictions.

The oil filter **14** is a canister-type and has an inlet **22** which communicates with and receives oil from the manifold. The housing has a lower screw or spin-on body **24** which is removable. The body **24** contains a suitable element **26** of a filtering material such as paper or fiber which is periodically replaceable. Preferably the filter is a conventional filter available from manufacturers such as FRAM, WIX and others. Particulates and contaminants are substantially removed as the oil passes through the filter element **26**.

The oil exiting oil filter **14** is then directed to an air-to-liquid heat exchanger **15**. The air-to-liquid heat exchanger may be a tube or plate design and is preferably of the tube type having a tube **28** carrying the oil to be cooled which extends in serpentine fashion within the heat exchanger housing. Because air is a relatively poor conductor of heat, the heat transfer area between the air passing over the tubes is increased by adding fins **30** to the tubes. The heat exchanger **15** is located in the vehicle to receive substantial airflow, preferably immediately adjacent and in front of the radiator for the engine cooling system. Ducting may be provided to increase airflow to the heat exchanger **15**.

The oil which has been cooled and filtered is returned to an inlet port **17** on the manifold via line **32**. The inlet port **17** connects with internal passageway **34** communicating with outlet port **12**. The outlet port **12** on the bottom of the manifold is aligned and communicates with the engine block port **P** so the cooled and filtered oil returns to the engine to provide lubrication. An additional outlet port **12A**, as seen in FIG. 3, is provided to supply cooled and filtered oil to the high pressure oil pump.

Additional filtering may be provided by a bypass filter **18**. The bypass filter **18** is a separate filter and may be of the canister type as described with reference to filter **14**. A bypass line **36** removes a portion of the cooled and filtered oil prior to the oil entering into port **17** and directs the oil to the inlet of the bypass filter **18**. The bypass filter **18** has an outlet which directs the flow via line **38** to port **12** to be returned to the engine.

Passageway **34** connected to port **17** may also be intercepted by passageways **40**, **42** and **44** which are suitably threaded for connection to gauges such as the pressure gauge at **40**, temperature gauge **42** and oil feed for the turbo at **44**. Other sensing locations can also be provided to measure other operating parameters. Provision is made in the manifold to circulate coolant through the engine cooling system. Coolant enters the manifold at port **55** and exits at port **56**. The coolant is circulated by a water pump through the existing passages in the engine block and radiator.

In many engines, metal particles will be released during operation. In addition to metal particles, sand used in the engine block casting process and retained in the engine may also be released. These larger, particulate materials can be harmful to the engine and may also quickly clog or reduce the effectiveness of the filters, such as the FIA filter, which are primarily intended to remove finer particulate materials.

The oil cooling system of the present invention may be provided with a particulate filter internal within the manifold **11** to trap and remove larger particulates which may otherwise quickly impair the effectiveness of element type filters. A cavity **50** is provided within the housing and removably receives a screen **52** having a mesh in the 0.003 to 0.005 inch range. The screen is accessible and removable by detaching the manifold from the engine block or access may be provided through a suitable access panel **54** on the manifold. A portion of the cooled and filtered oil entering the manifold at port **17** may be internally diverted to the cavity **50** and onto a surface of the particulate screen **52**. The oil will, due to pressure existing in the system and gravity, flow downwardly through the screen to ports **12** and **12A** returning to the engine. Particulate material will collect on the screen **52** and may be periodically removed by accessing the screen by removal of the manifold or through an access panel as described above.

An oil bleed valve **16** may be provided as seen in FIG. 4. The oil bleed valve **16** is in a passageway **60** communicating with passageway **34**. A ball **65** is held in place by a spring **66**. The spring **66** is retained by a plug **68** with a small orifice **70**. Passageway **60** is closed by a plug **72**. When the pressure in passageway **34** exceeds a predetermined level, the ball **65** will open returning oil to the engine crank case via line **62**, allowing air within the engine's oil system to be removed.

FIGS. 2 and 3 illustrate a representative configuration for the manifold and for the configuration of the passageways within the manifold which may be utilized in connection with the cooling system of the present invention. However, it will be appreciated that the particular configuration shape of the manifold may vary with the intended installation. It will also be appreciated that the present system has broad utility and application to various internal combustion engines of different types and displacement. Accordingly, while the present invention has been described in detail with reference to a preferred embodiment it is to be understood that the disclosure has only illustrated an exemplary embodiment.

FIGS. 5 and 6 are schematics which show a by-pass **100** that may be incorporated into the system **10** shown in FIG. 1. Referring to FIG. 5, which shows the by-pass **100** which has a housing **102** having an inlet **106** and outlet **108** connected by a passageway **110** is intercepted by a pressure by-pass line **112** and a temperature by-pass line **114** both of which communicate with by-pass outlet **120**. A pressure control valve **122** such as a spring-biased valve is located in line **112**. The valve **122** may be a direct acting relief valve which opens at a fixed pre-set pressure established by a spring which may be adjusted by a spring adjustment screw. The valve is set to by-pass fluid to the outlet when the differential pressure between the inlet and outlet of the oil cooler is above the setting, typically about 40-50 psi, which differential may initially occur during start-up before the pressure in the system generated by the engine oil pump has fully pressurized the engine oil system.

Similarly, the temperature by-pass line includes a thermostatic control **126** which has a selected opening temperature generally between 170°-200° F. The thermostat control will block flow through the by-pass **100** and direct the oil flow to outlet **120** until such time as the temperature of the oil reaches a temperature at which the thermostat is set to open. Thus, the

5

oil entering the by-pass **100** will be directed to the cold by-pass outlet **120** if either: (1) the engine oil is below a predetermined temperature by the closed thermostat **126** or (2) the oil pressure differential between the inlet and outlet of the oil cooling heat exchanger **15** is greater than the differential setting of the control valve **122**.

In FIG. **6**, the by-pass **100** is shown in the system **10** of FIG. **1**. The system **10** has been simplified in FIG. **6** but is as described in greater detail with reference to FIG. **1** which description is incorporated here by reference. The by-pass **100** is located adjacent the air-to-liquid heat exchanger **15**, either ahead of the heat exchanger **15** or downstream of the discharge. In FIG. **6**, the by-pass **100** is shown ahead of the heat exchanger **15**. The outlet **108** of the by-pass **100** is in communication with the heat exchanger **15**. The by-pass outlet **120** is connected via by-pass line **130** to line **32** leading to the manifold **11**. Accordingly, if engine oil is below a predetermined temperature or if a predetermined pressure differential exists between the inlet and outlet of oil **15** exceeding the setting of control valve **122**, oil will be by-passed through by-pass **100** allowing the system oil temperature and pressure to build to acceptable levels due to engine operation. This typically may take 4 or 5 seconds after start up. The by-pass **100** lessens stress and wear on engine components due to oil conditions which reduce the effectiveness of the lubrication.

In FIG. **7**, a modification of the system **10** of claim **1** is shown which is adopted for engines which operate in colder climates. The system of FIG. **7** is indicated by the numeral **200** and includes a manifold **11** secured to the engine block B as described with reference to FIG. **1**. The hot, unfiltered oil from the engine is directed to a filter **14** by line **20** and exits the filter **14** to tee **202** having outlet lines **232**, **232A**. Line **232** is directed to by-pass **100** located adjacent an air-to-liquid heat exchanger **15**. The by-pass **100** is as described with reference to FIGS. **5** and **6**. The heat exchanger **15** is as has been previously described with reference to FIG. **1**. The by-pass **100** will direct engine oil either to the heat exchanger **15** or, if the temperature or pressure conditions of the oil are within predetermined by-pass parameters, the oil will be by-passed around the heat exchanger **15** via line **130** to line **32**.

The engine oil discharged through line **232A** is directed to a coolant-to-oil heat exchanger **225** which receives liquid coolant at inlet port **226** from the engine cooling system under pressure from the engine water pump **230** which is recirculated from the heat exchanger via line **234**. The thermostat in the engine cooling system will operate at a preset opening temperature of typically around 190°-200° F. and be circulated by the water pump **230** through the heat exchanger **225** to warm the oil initially flowing through the heat exchanger from the filter. As the engine warms and the engine oil is heated, the heat exchanger **225** will operate to maintain the oil temperature at about the temperature of the engine coolant fluid from the water pump. Thus, the heat exchanger initially assists in heating the engine oil during the initial engine start-up and thereafter will operate to maintain the oil at an acceptable temperature.

The dual system of FIG. **7** having both an air heat exchanger and a liquid heat exchanger in parallel enhances or increases the effective heat exchange area and operates to cool engine oil during operation and will heat or warm the engine oil during initial start-up and has particular application to engines operating in colder climates or conditions.

It will be obvious to those skilled in the art to make various changes, alterations and modifications to the invention described herein. To the extent such changes, alterations and

6

modifications do not depart from the spirit and scope of the appended claims, they are intended to be encompassed therein.

We claim:

1. An oil cooling system for 6.0 L VT365 diesel engine having an engine block with an engine oil supply inlet, an engine coolant water outlet, an engine oil supply outlet located in a horizontal plane, an oil pump, and a water cooling system with a water pump, the engine having an original equipment liquid-to-liquid heat exchanger in which heat from the oil is transferred to the water cooling system, the original equipment liquid-to-liquid heat exchanger having a predetermined mounting configuration, the original equipment liquid-to-liquid heat exchanger further comprising an oil inlet, an oil outlet, a water inlet, and a water outlet each in a predetermined location, said oil cooling system comprising:

(a) a manifold having a housing, said housing having an oil inlet port for receiving a flow of oil from the engine oil supply outlet, the housing further comprising an oil outlet port, the housing being sized and shaped to match the mounting configuration of the original equipment liquid-to-liquid heat exchanger, the housing further being configured to position said oil inlet port in a horizontal plane adjacent the engine oil supply outlet of the engine block at the location of the oil inlet of the original equipment liquid-to-liquid heat exchanger whereby the manifold is capable of receiving the flow of oil from the engine oil pump without leakage;

(b) a first oil filter receiving a flow of oil from the outlet port of the manifold;

(c) an air-to-liquid heat exchanger having heat exchanger elements positioned in an airflow, the air-to-liquid heat exchanger receiving a flow of oil from said manifold and cooling the oil by transferring heat to air flowing past the air-to-liquid heat exchanger, the air-to-liquid heat exchanger having a discharge directed to the engine oil supply inlet via a passageway in said manifold;

(d) the housing further comprising an un-branched bypass water passage having a water inlet port and a water outlet port, the housing further configured to position the water inlet port adjacent engine coolant water outlet of the engine block at the location of the water inlet of the original equipment liquid-to-liquid heat exchanger and to position the manifold water outlet port so that water is discharged directly to the water cooling system of the engine, whereby the housing receives a flow of water from the engine without leakage and conveys the entirety of the flow of water exiting the engine from the engine water coolant outlet directly back into to the water cooling system of the engine without passing through an oil cooling or water cooling heat exchanger. (d) the housing further comprising an un-branched bypass water passage having a water inlet port and a water outlet port, the housing further configured to position the water inlet port adjacent engine coolant water outlet of the engine block at the location of the water inlet of the original equipment liquid-to-liquid heat exchanger and to position the manifold water outlet port so that water is discharged directly to the water cooling system of the engine, whereby the housing receives a flow of water from the engine without leakage and conveys the entirety of the flow of water exiting the engine from the engine water coolant outlet directly back into to the water cooling system of the engine without passing through an oil cooling or water cooling heat exchanger.

2. The oil cooling system of claim **1** further including a second oil filter connected via a bypass line receiving a por-

tion of the flow of oil from the engine oil supply outlet and having an outlet directed to the engine oil supply inlet.

3. The oil cooling system of claim 1 further including at least one sensor port in said manifold.

4. The oil cooling system of claim 1 wherein said first oil filter is a cartridge type oil filter.

5. The oil cooling system of claim 1 further including a particulate filter in said housing, the particulate filter having a filter screen with a mesh size of at least 0.003 inch receiving a portion of the flow of oil from said manifold.

6. The oil cooling system of claim 5 wherein said filter screen is removable and is horizontally disposed in said manifold.

7. The oil cooling system of claim 6 wherein said flow from the heat exchanger is directed to the top of said screen.

8. The oil cooling system of claim 4 wherein the first filter is a filter having a replaceable filter element.

9. The oil cooling system of claim 1 wherein said air-to-liquid heat exchanger is a tube and fin heat exchanger.

10. The oil cooling system of claim 1 including a check valve disposed between the oil outlet port of the manifold and the first filter.

11. The oil cooling system of claim 1 wherein said manifold includes a bleed valve communicating with the filtered and cooled oil supply.

12. The oil cooling system of claim 1 including a by-pass communicating with the oil outlet port from said manifold, said by-pass having a pressure relief valve and a thermostatic valve for connecting to a by-pass line for directing the flow of oil from the manifold around said air-to-liquid heat exchanger if the engine oil temperature is below a predetermined value or the oil pressure differential between the inlet and outlet of the oil cooler is above a predetermined values.

13. The oil cooling system of claim 12 wherein the flow of oil from the manifold is also directed to a liquid-to-liquid heat exchanger in heat exchange relationship with coolant from the water cooling system of the engine.

* * * * *